


Features

- MINIATURE SIL PACKAGE
- FULLY SHIELDED
- DATA RATES UP TO 20KBITS/S
- NARROW BAND CRYSTAL TECHNOLOGY
- PROVIDE OVER 500M RANGE AT LOW DATA
- AVAILABLE ON 434.075 MHz
- WILL OPERATE IN PRESENCE OF 433.92 MHz SYSTEMS
- WIDE OPERATING VOLTAGE (2.2 – 10 vdc)
- EN 300-220 compliant module

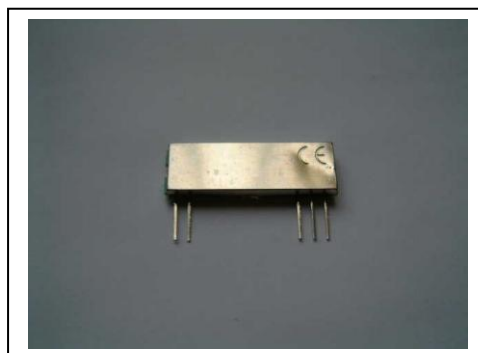

Applications

- REMOTE CONTROL FOR CRANES ETC
- WIRELESS MONITORING
- DISPERSED ALARM APPLICATIONS
- DOMESTIC AND COMMERCIAL SECURITY

Compatible Receiver Modules

- MKR7-XXX (see data sheet MKR7)
- GR1-XXX

General Description

The MKT7 miniature transmitter UHF radio module enables the implementation of a wireless telemetry link at data rates of up to 20Kbit/s when used with the compatible MKR7 receiver modules.

The transmitter is based on a classical phase lock loop using a crystal reference oscillator. This results in an accurately controlled RF output in the frequency domain. A significant advantage of this is that narrow filtering can then be used in the receiver which results in high interference immunity.

In addition, the module is fitted with an on board voltage regulator which enhances the module performance due to better supply filtering as well as ensuring a constant RF output level.

The MKT7 module will suit one-to-one and multi-node wireless links in applications including building and car security, remote industrial process monitoring and computer networking. Because of its small size and low power requirements, this module is ideal for use in portable battery powered wireless applications.

Absolute Maximum Ratings: Transmitter

Operating temperature:	-25°C to +55°C
Storage temperature:	-40°C to +100°C
Supply Voltage (pin 3)	10V
Data input (pin 5)	10V

Electrical Characteristics: Transmitter

	pin	min.	Typ.	max.	units	notes
DC LEVELS						
Supply voltage	3	2.2	5.0	10.0	Volts	
Current & RF POWER						
434.075 MHz						
Supply current @ $V_{CC} = 5V$	3		7		mA	1
RF power	2		3		mW	1
RF & Data						
2 nd harmonic			-60		dBm	2
Harmonics @ > 1GHz			-60		dBm	2
Initial frequency accuracy				±100	Hz	
Frequency accuracy over full temp range				±10	KHz	
FM deviation			20		KHz	3
Power up time to full RF			5		ms	
Data rate				20000	bits/s	
Data pulse width		50			µs	

- Note 1:** measured into a 50Ω impedance
A 10mW version will be available Q2 2002.
- 2:** the limit for the European spec EN 300 220 is -36dBm
- 3:** A ±2.5 KHz FM deviation of the RF carrier is also available. Please consult sales desk.

Connection Details

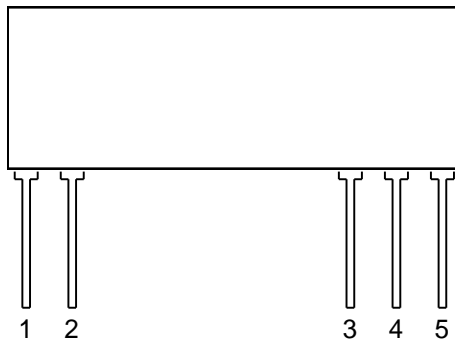


Figure 1: MK Transmitter

Pin Description:

RF GND (*pin 1*)

RF ground pin, internally connected to pin 4 (0V). This pin should ideally be connected to the nearest ground plane (e.g. coax braid, main PCB ground plane etc.)

RF OUT (*pin2*)

50 Ω RF antenna output. To achieve best results the antenna impedance must match that of the module.

V_{CC} (*pin 3*)

+Ve supply pin. The module will generate RF when V_{CC} is present.

GND (*pin 4*)

Supply and data ground connection, connected to pin 1.

Data IN (*pin 5*)

This input has an impedance of 47K Ω and should ideally be driven by a CMOS logic drive or compatible.

Application Information

Antenna Design

The design and positioning of the antenna is as crucial as the module performance itself in achieving a good wireless system range. The following will assist the designer in maximising system performance.

The antenna should be kept as far away from sources of electrical interference as physically possible. If necessary, additional power line decoupling capacitors should be placed close to the module.

The antenna 'hot end' should be kept clear of any objects, especially any metal as this can severely restrict the efficiency of the antenna to receive power. Any earth planes restricting the radiation path to the antenna will also have the same effect.

Best range is achieved with either a straight piece of wire, rod or PCB track @ $\frac{1}{4}$ wavelength (15.5cm @ 434 MHz). Further range may be achieved if the $\frac{1}{4}$ wave antenna is placed perpendicular in the middle of a solid earth plane measuring at least 30cm radius. In this case, the antenna should be connected to the module via some 50 ohm characteristic impedance coax

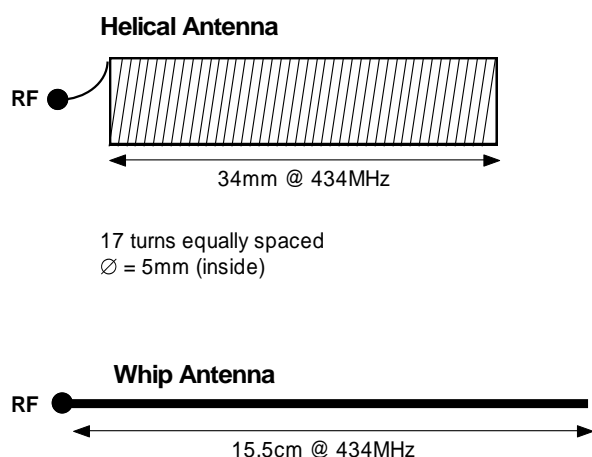


Figure 2: Antenna Configurations To Be Used With The MKT7 Transmitter Modules

Application Circuit

The application circuit shows how the MKT7 transmitter can easily be integrated into a system to form a wireless link

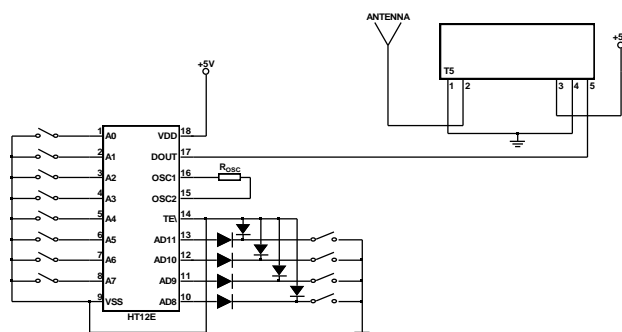


Figure 3: MK Transmitter Application Circuit

Mechanical Dimensions

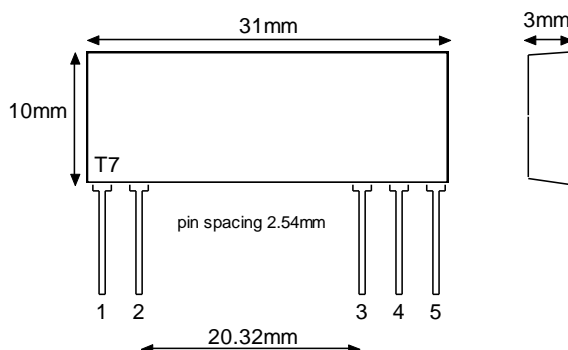


Figure 4: MK Transmitter

Ordering Information

Standard Product;

Part No	Description
MKT7-434-075	Medium Band FM Transmitter 434,075 MHz

Please consult our sales department for further information.

M.K.Consultants (UK) Ltd

288a-290 Quenns Road
HALIFAX
West Yorkshire
HX1 4NS
England

Tel +44 (0) 1422 329002
Fax +44 (0) 1422 353153

Email: admin@mkconsultants.eu
Web: www.mkconsultants.eu

Disclaimer

MKConsultants have a policy to continually improve the reliability and performance of their products. We therefore reserve the right to upgrade our products performance without notice.
Although the data contained herewith is believed to be accurate, however we do not assume any responsibility whatsoever for errors or omissions this document may contain.
In addition, we do not imply warranty or fitness for any particular application especially life support applications.