

ARM-IO

Advanced Radio Modem

Licence free M2M*

>1 km in 868 MHz
25mW

Serial / Digital / Analog / PT100
& Low Power



Radio modems ARM-IO 868MHz 25mW have been developed in order to answer to a big need of wireless data transmission in disturbed industrial environment (400m), and in outside environment until 1000m LOS (line of sight).

Presented in a IP65 box with cable gland and antenna, these modules exist in different versions: Serial (RS232/RS485), Digital, Analogical (4-20mA, PT100), and Low Power.

ARM-IOD and -IOA can work like Modbus slaves or in mirror mode. ARM-IOs allow to create a wireless point-to-point serial link, or multipoint serial link.

On the ARM-IOD and -IOA (with external power supply), the high-performance sleep mode divides the power consumption by 100, allowing to supply the modem with a small solar panel.

The ARM-IOD-LP (Digital, Low Power), with lithium battery can work in pulse counting or states reports, like to read a water counter, or to transmit 2 digital states.

The ARM-IOA-LP (Analogical Low Power) is equipped with an output which power a sensor during the "awakeness" period, making the measurement, and transmitting it by radio.

These information can be got back via an ARM-SE in modbus /TCP or /RTU, or via an ARM-X (or -D and -DA) in mirror mode.

APPLICATIONS TYPES

SIMPLE AND EFFICIENT WIRELESS TRANSMISSION

- Street furniture, electronic road signs
- Water management
- Tower crane, anemometer
- Irrigation, greenhouses
- Grain silos
- UUV, UAV, military field ...



► New radio modems range **868 MHz** (1 - 25mW)

► **European norm,**
Licence free

► **Low cost**
(best performance/price ratio)

► **Inputs/Outputs:** serial link **RS232/485** in transparent or secured mode, **digital input** counting ou boolean, **analogical input** 0-10V / 4-20mA / PT100, **lithium battery version**.


► **«NLOS» functioning**
(non line of sight), alternative to Wi-Fi in obstructed and non line of sight areas.

► **Automatique configuration**
(+ "expert" mode via radio)

► **Advanced functions :**
LBT, repeater routing mode, ...

► **IP65 box** for outdoor use,
antenna connector

► Infrastructure example M2M

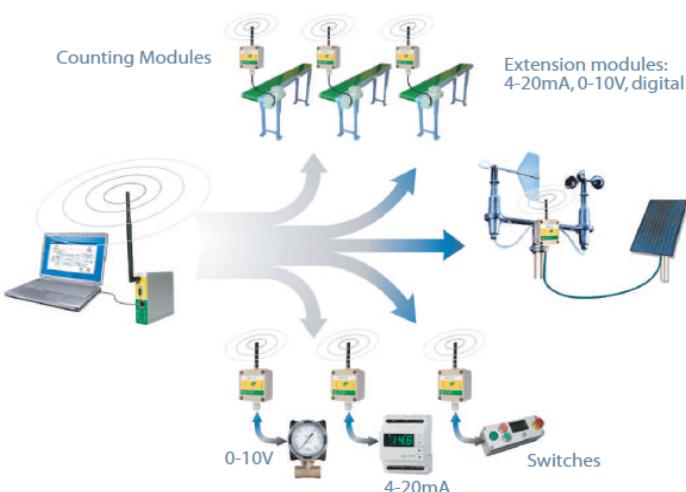

www.atim.com)))

ARM-IO

Advanced Radio Modem

IP65 ABS box
for outside mounting

SMA female connector for
external antenna

Weight : 100 g



ARM range compatibility

ARM-SE : radio modem Serial / Ethernet

ARM-X : "eXtended" inputs/outputs versions

ARM-D : digital version, 2 inputs 2 outputs

ARM-DA : digital version, 2 inputs 2 outputs
(+ 1 input and 1 output 4/20 mA)

ARM-C8 et -U8 : transceivers O.E.M version

Articles references

ARM-IOS : serial version (RS232 / RS485)

ARM-IOD : digital version (1 input + 1 output)

ARM-IOA : analogical version (1 analogical input + 2 digital outputs)

ARM-IO-P : PT100 (1 input PT100)

ARM-IOD-LP : Low Power lithium battery, 2 digital inputs

ARM-IOA-LP : Low Power lithium battery, 2 voltage inputs + 1 sensor power supply output

CONNECTIONS



Connection via terminal bloc 6 points at the 2.54mm pitch

-S: 1 port RS232 Rx/TxD + 1 port RS485 2 wires A/B

-D: 1 input (bool or counter 100Hz max), 1 digital output

-A: 1 input 4-20mA or 0-10V + 2 digital inputs

-P: 1 input for temperature sensor PT100

-LP (low power) version:

-D-LP: 2 digital inputs

-A-LP: 2 inputs voltage 0-2,5V + 1 output PNP (power supply sensor)

Connection via M12 connector 4 points (watertight)

[0V - IN1 - IN2 - OUT1]

Technical specifications

FUNCTIONALITIES

ARM-IOS (Serial)

Serial transmission, transparent or secured modes, 250 octets buffer

Serial link debit : 1200bps to 11500bps

Configuration via AT commands



ARM-IOD/-IOA/-IOP/-LP (digital/analogue/PT100/low power)

Mirror mode (LBT, listen before talk + automatic change channel)

Slave modbus mode

"Sensor" mode, setting off emission with alarm

COMMON FUNCTIONS

Possibility of configuration via radio with an ARM-SE

Repetition path with routing



GENERAL INFORMATION

CONFIGURATION :

Automatic

Configuration and test mode in local and in a distance (depends on the version)

ANTENNE :

SMA female antenna connector

Recommended antennas: angled ½ wave or shorted ¼.

ENVIRONNEMENT : temperature functioning/storage: -30°C to +60°C/-40°C to +70°C

NORMALIZATION : Directive RTTE1995/5/CE - ETS300-220-3 v1.1.1

CEM EN 301 489-3 v1.4.1 - Sécurité Y NF EN60950 Ed.2000

LIGHTS AND OTHER : 1 or 2 LEDs, emission/reception (depending on the version)

1 jumper for reset (back to factory settings), 1 jumper for RS485 terminal resistance



RADIO INTERFACE "RF"

868-870MHz band, 1-25mW (0-14dBm)

GFSK modulation

Radio debit: 19200bps NRZI

16 channels configurable with soft or automatically

Sensibility in reception : -102dBm @ 9600bps



POWER SUPPLY

ARM-IOS/-D/-A/-P : 5-30Vcc ARM-IO-LP: integrated lithium battery 3,6V

Consumption @ 12V : 100mA in emission, 25mA in reception, 250µA in sleep mode / ARM-LP ~15µA

DISTRIBUTED BY :

 **SYDMA**
Kablosuz Kontrol

EL-İF Mühendislik Otomasyon Elektronik
Elektronik Yazılım San. Tic. Ltd. Şti.

Acıbadem Şehit Sükrü Sok. Bosphorus
Sitesi E-Blok No:1 Üsküdar - İSTANBUL
Tel: 0216 339 62 47-48
www.sydma.com



www.atim.com

Chemin des guillettes • F-38250 Villard de Lans
Tél. +33(0)4 76 95 50 65 • Fax +33(0)4 76 95 50 64 • Email : arm@atim.com